

# Release Notes

## FortiAnalyzer 7.2.3



**FORTINET DOCUMENT LIBRARY**

<https://docs.fortinet.com>

**FORTINET VIDEO LIBRARY**

<https://video.fortinet.com>

**FORTINET BLOG**

<https://blog.fortinet.com>

**CUSTOMER SERVICE & SUPPORT**

<https://support.fortinet.com>

**FORTINET TRAINING & CERTIFICATION PROGRAM**

<https://www.fortinet.com/training-certification>

**FORTINET TRAINING INSTITUTE**

<https://training.fortinet.com>

**FORTIGUARD LABS**

<https://www.fortiguard.com>

**END USER LICENSE AGREEMENT**

<https://www.fortinet.com/doc/legal/EULA.pdf>

**FEEDBACK**

Email: [techdoc@fortinet.com](mailto:techdoc@fortinet.com)



October 19, 2023

FortiAnalyzer 7.2.3 Release Notes

05-723-914608-20231019

# TABLE OF CONTENTS

<b>Change Log</b>	<b>6</b>
<b>FortiAnalyzer 7.2.3 Release</b>	<b>7</b>
Supported models	7
FortiAnalyzer VM subscription license	7
Management extension applications	8
Supported models for MEA	8
Minimum system requirements	8
FortiRecorder	9
Supported models for FortiRecorder	9
Supported cameras	9
<b>Special Notices</b>	<b>11</b>
FortiGuard Firmware list does not include version 7.2.3 to upgrade	11
Management Extensions visibility in the GUI	11
FortiManager Features removed	11
Setup wizard requires FortiCare registration	11
Fortinet verified publisher docker image	12
Hyperscale firewall mode	13
Modifying the interface status with the CLI	13
Citrix XenServer default limits and upgrade	14
FortiAnalyzer VM upgrade requires more memory	14
Maximum ADOM limits for FortiAnalyzer	14
Port 8443 reserved	14
Hyper-V FortiAnalyzer-VM running on an AMD CPU	15
SSLv3 on FortiAnalyzer-VM64-AWS	15
<b>Upgrade Information</b>	<b>16</b>
Downgrading to previous firmware versions	16
Firmware image checksums	16
FortiAnalyzer VM firmware	16
SNMP MIB files	18
<b>Product Integration and Support</b>	<b>19</b>
Supported software	19
Web browsers	20
FortiOS and FortiOS Carrier	20
FortiADC	20
FortiNDR and FortiAI	20
FortiAnalyzer	21
FortiAuthenticator	21
FortiCache	21
FortiClient	21
FortiDDoS	21
FortiDeceptor	22
FortiFirewall and FortiFirewallCarrier	22

FortiMail .....	22
FortiManager .....	22
FortiNAC .....	22
FortiProxy .....	22
FortiSandbox .....	23
FortiSOAR .....	23
FortiSwitch ATCA .....	23
FortiWeb .....	23
Virtualization .....	23
Feature support .....	24
Language support .....	25
Supported models .....	25
FortiGate models .....	26
FortiGate special branch models .....	31
FortiCarrier models .....	35
FortiCarrier special branch models .....	37
FortiADC models .....	40
FortiNDR and FortiAI models .....	40
FortiAnalyzer models .....	40
FortiAuthenticator models .....	41
FortiCache models .....	41
FortiDDoS models .....	41
FortiDeceptor models .....	42
FortiFirewall models .....	42
FortiFirewallCarrier models .....	43
FortiMail models .....	43
FortiNAC models .....	44
FortiProxy models .....	44
FortiSandbox models .....	44
FortiSOAR models .....	45
FortiSwitch ATCA models .....	45
FortiWeb models .....	45
<b>Resolved Issues .....</b>	<b>46</b>
Device Manager .....	46
FortiSOC .....	46
FortiView .....	46
Log View .....	46
Others .....	47
Reports .....	47
System Settings .....	47
Common Vulnerabilities and Exposures .....	48
<b>Known Issues .....</b>	<b>49</b>
Device Manager .....	49
Event Management .....	49
FortiSOC .....	49
FortiView .....	49
Log View .....	50

---

Others .....	50
Reports .....	50
System Settings .....	51
<b>Appendix A - Default and maximum number of ADOMs supported .....</b>	<b>52</b>
Hardware models .....	52
Virtual Machines .....	53
FortiAnalyzer subscription license .....	53
FortiAnalyzer perpetual license .....	53

# Change Log

Date	Change Description
2023-06-08	Initial release.
2023-06-16	Updated <a href="#">Resolved Issues on page 46</a> .
2023-06-20	Updated <a href="#">Special Notices on page 11</a> and <a href="#">Known Issues on page 49</a> .
2023-06-23	Updated <a href="#">Resolved Issues on page 46</a> and <a href="#">Known Issues on page 49</a> .
2023-06-26	Updated <a href="#">FortiOS and FortiOS Carrier on page 20</a> .
2023-06-27	Updated <a href="#">Special Notices on page 11</a> .
2023-07-10	Updated <a href="#">FortiProxy on page 22</a> .
2023-07-17	Updated <a href="#">Resolved Issues on page 46</a> .
2023-07-19	Updated <a href="#">Web browsers on page 20</a> .
2023-09-06	Updated <a href="#">Known Issues on page 49</a>
2023-09-20	Updated <a href="#">FortiGate special branch models on page 31</a> .
2023-09-25	Updated <a href="#">FortiClient on page 21</a> .
2023-10-12	Updated <a href="#">Resolved Issues on page 46</a> and <a href="#">Known Issues on page 49</a> .
2023-10-17	Updated <a href="#">Resolved Issues on page 46</a> and <a href="#">Known Issues on page 49</a> .
2023-10-19	Updated <a href="#">Management extension applications on page 8</a> .

# FortiAnalyzer 7.2.3 Release

This document provides information about FortiAnalyzer version 7.2.3 build 1405.



The recommended minimum screen resolution for the FortiAnalyzer GUI is 1920 x 1080. Please adjust the screen resolution accordingly. Otherwise, the GUI may not display properly.

This section includes the following topics:

- [Supported models on page 7](#)
- [FortiAnalyzer VM subscription license on page 7](#)
- [Management extension applications on page 8](#)
- [FortiRecorder on page 9](#)

## Supported models

FortiAnalyzer version 7.2.3 supports the following models:

<b>FortiAnalyzer</b>	FAZ-150G, FAZ-300F, FAZ-300G, FAZ-400E, FAZ-800F, FAZ-800G, FAZ-1000F, FAZ-2000E, FAZ-3000F, FAZ-3000G, FAZ-3500E, FAZ-3500F, FAZ-3500G, FAZ-3700F, and FAZ-3700G.
<b>FortiAnalyzer VM</b>	FAZ_DOCKER, FAZ_VM64, FAZ_VM64_ALI, FAZ_VM64_AWS, FAZ_VM64_AWSONdemand, FAZ_VM64_Azure, FAZ_VM64_GCP, FAZ_VM64_IBM, FAZ_VM64_HV (including Hyper-V 2016, 2019), FAZ_VM64_KVM, FAZ_VM64_OPC, FAZ_VM64_XEN (for both Citrix and Open Source Xen),



FAZ-300F supports the subscription license for the SOC service. However performance may be impacted because FAZ-300F has fewer resources and a smaller CPU than other FortiAnalyzer models that support the SOC service.

## FortiAnalyzer VM subscription license

The FortiAnalyzer VM subscription license supports FortiAnalyzer version 6.4.1 and later. For information about supported firmware, see [FortiAnalyzer VM firmware on page 16](#).

See also [Appendix A - Default and maximum number of ADOMs supported on page 52](#).



You can use the FortiAnalyzer VM subscription license with new FAZ-VM installations. For existing FAZ-VM installations, you can migrate to a FortiAnalyzer VM subscription license, starting with FortiAnalyzer 7.0.1. See the [FortiAnalyzer 7.0.1 VM License Migration Guide](#).

## Management extension applications

The following section describes supported models and minimum system requirements for management extension applications (MEA) in FortiAnalyzer 7.2.3.



FortiAnalyzer uses port TCP/443 or TCP/4443 to connect to the Fortinet registry and download MEAs. Ensure that the port is also open on any upstream FortiGates. For more information about incoming and outgoing ports, see the [FortiAnalyzer 7.0 Ports Guide](#).

## Supported models for MEA

As of FortiAnalyzer 7.2.3, the *Management Extensions* pane is only visible in the GUI when docker status is enabled and at least one MEA is enabled and downloaded. For more information about enabling and using the MEAs, see the Management Extensions documentation in the [FortiAnalyzer Documents Library](#).

You can use any of the following FortiAnalyzer models as a host for management extension applications:

<b>FortiAnalyzer</b>	FAZ-3000F, FAZ-3000G, FAZ-3500E, FAZ-3500F, FAZ-3500G, FAZ-3700F, and FAZ-3700G.
<b>FortiAnalyzer VM</b>	FAZ_DOCKER, FAZ_VM64, FAZ_VM64_ALI, FAZ_VM64_AWS, FAZ_VM64_AWSOnDemand, FAZ_VM64_Azure, FAZ_VM64_GCP, FAZ_VM64_IBM, FAZ_VM64_HV (including Hyper-V 2016, 2019), FAZ_VM64_KVM, FAZ_VM64_OPC, FAZ_VM64_XEN (for both Citrix and Open Source Xen),

## Minimum system requirements

By default FortiAnalyzer VMs use the following system resource settings:

- 4 vCPU
- 16 GB RAM
- 500 GB disk space

Starting with FortiAnalyzer 7.0.0, RAM and CPU is capped at 50% for MEAs. (Use the `config system docker` command to view the setting.) If FortiAnalyzer has 8 CPUs and 16 GB RAM, then only 4 CPUs and 8 GB RAM are available to MEAs by default, and the 4 CPUs and 8 GB RAM are used for all enabled MEAs.

Some MEAs have minimum system requirements that require you to increase system resources. The following table identifies the minimum requirements for each MEA as well as the recommended system resources to function well in a production environment.



MEA minimum system requirements apply only to the individual MEA and do not take into consideration any system requirements for resource-sensitive FortiAnalyzer features or multiple, enabled MEAs.

Management Extension Application	Minimum system requirements	Recommended system resources for production*
<b>FortiSIEM</b>	<ul style="list-style-type: none"> <li>• 4 vCPU</li> <li>• 4 GB RAM</li> <li>• No change for disk storage</li> </ul>	<ul style="list-style-type: none"> <li>• 12 vCPU</li> <li>• 16 GB RAM</li> <li>• 500 GB</li> </ul>
<b>FortiSOAR</b>	<ul style="list-style-type: none"> <li>• 4 vCPU</li> <li>• 8 GB RAM</li> <li>• 500 GB disk storage</li> </ul>	<ul style="list-style-type: none"> <li>• 16 vCPU</li> <li>• 64 GB RAM</li> <li>• No change for disk storage</li> </ul>

\*The numbers in the *Recommended system resources for production* column are a combination of the default system resource settings for FortiAnalyzer plus the recommended system requirements for the MEA.

## FortiRecorder

This section identifies what FortiAnalyzer models support the FortiRecorder module and what FortiCamera models are supported.

### Supported models for FortiRecorder

Below is a list of the FortiAnalyzer appliances that support the FortiRecorder module.

Platform	Maximum number of cameras
FAZ-300F	6
FAZ-400E	12
FAZ-800F	16
FAZ-1000F	50
FAZ-2000E	40
FAZ-3000F	50
FAZ-3500G	50
FAZ-3700F	60

### Supported cameras

The FortiRecorder module supports the following FortiCamera models:

- FCM-CB20
- FCM-FD20
- FCM-FD20B
- FCM-FD40
- FCM-MB40
- FCM-MD20
- FCM-MD40
- FCM-OB30

# Special Notices

This section highlights some of the operational changes that administrators should be aware of in FortiAnalyzer version 7.2.3.

## FortiGuard Firmware list does not include version 7.2.3 to upgrade

FMG/FAZ 7.2.3 is not selectable in the FortiGuard Firmware list when performing an upgrade in the GUI. The 7.2.3 image file must instead be downloaded from FortiCloud and manually uploaded to FMG/FAZ. For instructions, see [Downloading files from Customer Service & Support](#) in the FortiAnalyzer Upgrade Guide.

## Management Extensions visibility in the GUI

As of FortiAnalyzer 7.2.3, the *Management Extensions* pane is only visible in the GUI when docker status is enabled and at least one management extension application (MEA) is enabled and downloaded. For more information about enabling and using the MEAs, see the Management Extensions documentation in the [FortiAnalyzer Documents Library](#).

## FortiManager Features removed

FortiAnalyzer 7.2.1 and later no longer supports FortiManager Features. If you have FortiManager Features enabled before upgrading to FortiAnalyzer 7.2.1, FortiManager Features will be permanently disabled after upgrading to FortiAnalyzer 7.2.1.

## Setup wizard requires FortiCare registration

Starting in FortiAnalyzer 7.2.1, the FortiAnalyzer Setup wizard requires you to complete the *Register with FortiCare* step before you can access the FortiAnalyzer appliance or VM. Previously the step was optional.

For FortiAnalyzer units operating in a closed environment, contact customer service to receive an entitlement file, and then load the entitlement file to FortiAnalyzer by using the CLI.


When FortiManager is managing FortiAnalyzer in a closed environment, FortiManager contains the FortiAnalyzer contract information, and you can point FortiAnalyzer to FortiManager.

## Fortinet verified publisher docker image


FortiAnalyzer 7.0.1 docker image is available for download from Fortinet's Verified Publisher public repository on dockerhub.

### To download the FortiAnalyzer image from dockerhub:


1. Go to dockerhub at <https://hub.docker.com/>.  
The dockerhub home page is displayed.

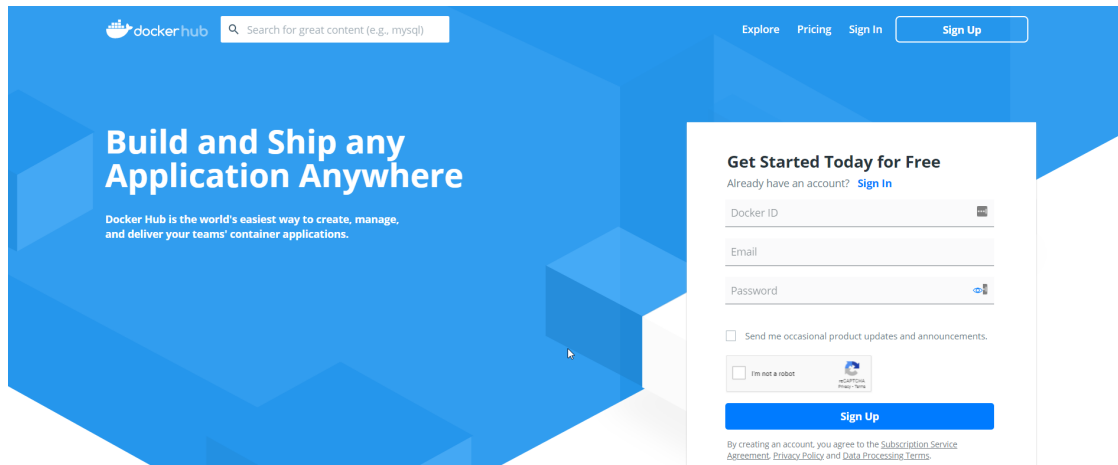

2. In the banner, click *Explore*.
3. In the search box, type *Fortinet*, and press *Enter*.  
The *fortinet/fortimanager* and *fortinet/fortianalyzer* options are displayed.

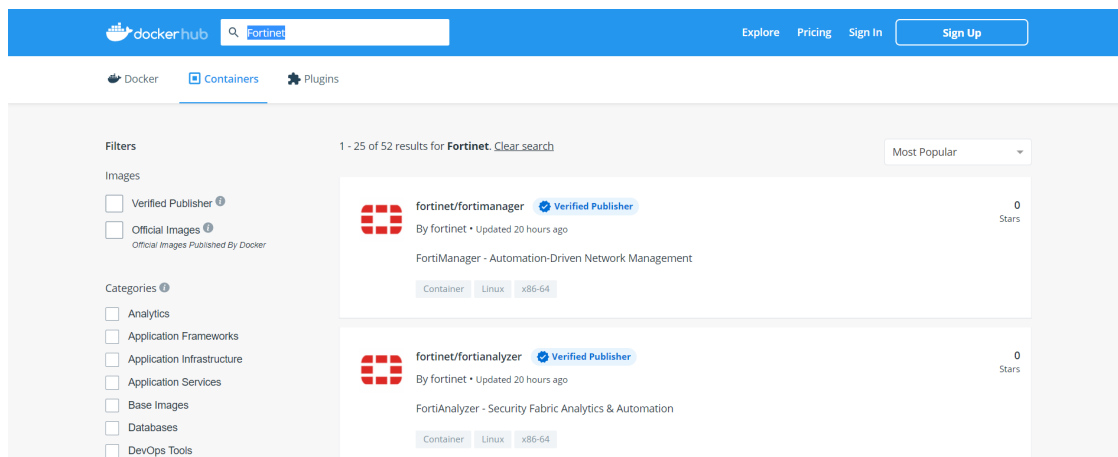

4. Click *fortinet/fortianalyzer*.  
The *fortinet/fortianalyzer* page is displayed, and two tabs are available: *Overview* and *Tags*. The *Overview* tab is selected by default.

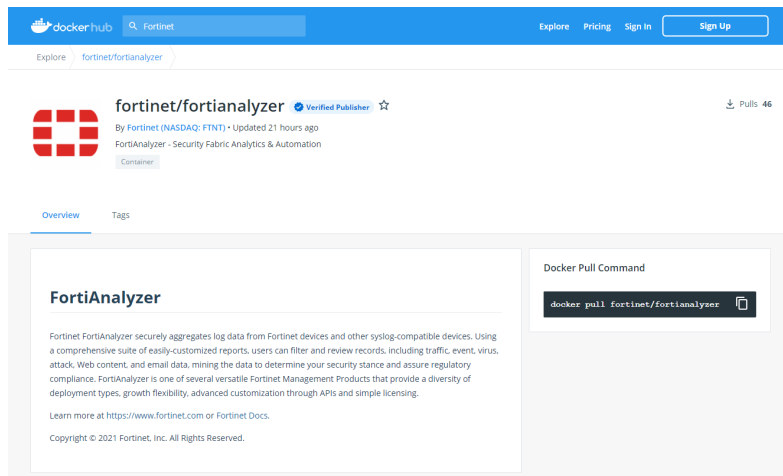

5. On the **Overview** tab, copy the docker pull command, and use it to download the image. The CLI command from the **Overview** tab points to the latest available image. Use the **Tags** tab to access different versions when available.

## Hyperscale firewall mode

FortiAnalyzer does not support logs from the following models when they have hyperscale firewall mode and netflow enabled:

- FortiGate-1800F
- FortiGate-1801F
- FortiGate-2600F
- FortiGate-2601F
- FortiGate-4200F
- FortiGate-4201F
- FortiGate-4400F
- FortiGate-4401F

FortiAnalyzer only supports logs when the normal firewall mode with standard FortiGate logging are enabled.

## Modifying the interface status with the CLI

Starting in version 7.0.1, the CLI to modify the interface status has been changed from `up/down` to `enable/disable`.

For example:

```
config system interface
  edit port2
    set status <enable/disable>
  next
end
```

## Citrix XenServer default limits and upgrade

Citrix XenServer limits ramdisk to 128M by default. However the FAZ-VM64-XEN image is larger than 128M. Before updating to FortiAnalyzer 6.4, increase the size of the ramdisk setting on Citrix XenServer.

### To increase the size of the ramdisk setting:

1. On Citrix XenServer, run the following command:

```
xenstore-write /mh/limits/pv-ramdisk-max-size 536,870,912
```

2. Confirm the setting is in effect by running `xenstore-ls`.

```
-----  
limits = ""  
pv-kernel-max-size = "33554432"  
pv-ramdisk-max-size = "536,870,912"  
boot-time = ""  
-----
```

3. Remove the pending files left in `/run/xen/pygrub`.



The ramdisk setting returns to the default value after rebooting.

---

## FortiAnalyzer VM upgrade requires more memory

When upgrading FortiAnalyzer VM units from a previous version to FortiAnalyzer 7.2.2, the upgrade may fail because of memory allocation. As of FortiAnalyzer 7.2.2, FortiAnalyzer VM requires 16 GB of RAM and 4 CPU.

**Workaround:** Before upgrading FortiAnalyzer VM to FortiAnalyzer 7.2.2, change the memory allocation to 16 GB of RAM.

## Maximum ADOM limits for FortiAnalyzer

FortiAnalyzer hardware devices and VMs display a warning when the maximum number of ADOMs is reached or exceeded. The platform does not enforce the limit; however, adding more ADOMs may affect the performance of the unit. For more details, see [Appendix A - Default and maximum number of ADOMs supported on page 52](#).

## Port 8443 reserved

Port 8443 is reserved for https-logging from FortiClient EMS for Chromebooks. See also [FortiAnalyzer 7.0 Ports Reference](#) on the Docs Library.

## Hyper-V FortiAnalyzer-VM running on an AMD CPU

A Hyper-V FAZ-VM running on a PC with an AMD CPU may experience a kernel panic. Fortinet recommends running VMs on an Intel-based PC.

## SSLv3 on FortiAnalyzer-VM64-AWS

Due to known vulnerabilities in the SSLv3 protocol, FortiAnalyzer-VM64-AWS only enables TLSv1 by default. All other models enable both TLSv1 and SSLv3. If you wish to disable SSLv3 support, please run:

```
config system global
    set ssl-protocol tlsv1
end
```

# Upgrade Information



Prior to upgrading your FortiAnalyzer, please review the FortiAnalyzer Upgrade Guide in detail as it includes all of the necessary steps and associated details required to upgrade your FortiAnalyzer device or VM.

See [FortiAnalyzer 7.2.3 Upgrade Guide](#).

You can upgrade FortiAnalyzer 7.0.0 or later directly to 7.2.3.

This section contains the following topics:

- [Downgrading to previous firmware versions on page 16](#)
- [Firmware image checksums on page 16](#)
- [FortiAnalyzer VM firmware on page 16](#)
- [SNMP MIB files on page 18](#)

## Downgrading to previous firmware versions

FortiAnalyzer does not provide a full downgrade path. You can downgrade to a previous firmware release by using the GUI or CLI, but doing so results in configuration loss. A system reset is required after the firmware downgrade process has completed. To reset the system, use the following CLI commands via a console port connection:

```
execute reset {all-settings | all-except-ip}  
execute format {disk | disk-ext4 | disk-ext3}
```

## Firmware image checksums

The MD5 checksums for all Fortinet software and firmware releases are available at the Customer Service & Support portal, <https://support.fortinet.com>. After logging in, go to *Download > Firmware Image Checksums*, enter the image file name including the extension, and select *Get Checksum Code*.

## FortiAnalyzer VM firmware

Fortinet provides FortiAnalyzer VM firmware images for Amazon AWS, Amazon AWSOnDemand, Citrix and Open Source XenServer, Linux KVM, Microsoft Hyper-V Server, and VMware ESX/ESXi virtualization environments.

### Amazon Web Services

- The 64-bit Amazon Machine Image (AMI) is available on the AWS marketplace.



### Citrix XenServer and Open Source XenServer

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.OpenXen.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains the QCOW2 file for the Open Source Xen Server.
- `.out.CitrixXen.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains the Citrix XenServer Virtual Appliance (XVA), Virtual Hard Disk (VHD), and OVF files.

### Google Cloud Platform

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.gcp.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation.

### Linux KVM

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.kvm.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains QCOW2 that can be used by qemu.

### Microsoft Azure

The files for Microsoft Azure have AZURE in the filenames, for example `<product>_VM64_AZURE-v<number>-build<number>-FORTINET.out.hyperv.zip`.

- `.out`: Download the firmware image to upgrade your existing FortiAnalyzer VM installation.

### Microsoft Hyper-V Server

The files for Microsoft Hyper-V Server have HV in the filenames, for example, `<product>_VM64_HV-v<number>-build<number>-FORTINET.out.hyperv.zip`.

- `.out`: Download the firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.hyperv.zip`: Download the package for a new FortiAnalyzer VM installation. This package contains a Virtual Hard Disk (VHD) file for Microsoft Hyper-V Server.



Microsoft Hyper-V 2016 is supported.

---

### Oracle Private Cloud

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.opc.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation.

### VMware ESX/ESXi

- `.out`: Download the 64-bit firmware image to upgrade your existing VM installation.
- `.ovf.zip`: Download either the 64-bit package for a new VM installation. This package contains an Open Virtualization Format (OVF) file for VMware and two Virtual Machine Disk Format (VMDK) files used by the OVF file during deployment.



For more information, see the [FortiAnalyzer Data Sheet](#) available on the Fortinet web site. VM installation guides are available in the [Fortinet Document Library](#).

---

## SNMP MIB files

You can download the *FORTINET-FORTIMANAGER-FORTIANALYZER.mib* MIB file in the firmware image file folder. The Fortinet Core MIB file is located in the main FortiAnalyzer version 5.00 file folder.

# Product Integration and Support

This section lists FortiAnalyzer 7.2.3 support of other Fortinet products. It also identifies what FortiAnalyzer features are supported for managed platforms and what languages FortiAnalyzer supports. It also lists which Fortinet models can be managed by FortiAnalyzer.

The section contains the following topics:

- [Supported software on page 19](#)
- [Feature support on page 24](#)
- [Language support on page 25](#)
- [Supported models on page 25](#)

## Supported software

FortiAnalyzer 7.2.3 supports the following software:

- [Web browsers on page 20](#)
- [FortiOS and FortiOS Carrier on page 20](#)
- [FortiADC on page 20](#)
- [FortiNDR and FortiAI on page 20](#)
- [FortiAnalyzer on page 21](#)
- [FortiAuthenticator on page 21](#)
- [FortiCache on page 21](#)
- [FortiClient on page 21](#)
- [FortiDDoS on page 21](#)
- [FortiDeceptor on page 22](#)
- [FortiFirewall and FortiFirewallCarrier on page 22](#)
- [FortiMail on page 22](#)
- [FortiManager on page 22](#)
- [FortiNAC on page 22](#)
- [FortiProxy on page 22](#)
- [FortiSandbox on page 23](#)
- [FortiSOAR on page 23](#)
- [FortiSwitch ATCA on page 23](#)
- [FortiWeb on page 23](#)
- [Virtualization on page 23](#)



To confirm that a device model or firmware version is supported by the current firmware version running on FortiAnalyzer, run the following CLI command:

```
diagnose dvm supported-platforms list
```

---



Always review the Release Notes of the supported platform firmware version before upgrading your device.

---

## Web browsers

FortiAnalyzer 7.2.3 supports the following web browsers:

- Microsoft Edge 114
- Mozilla Firefox version 96
- Google Chrome version 114

Other web browsers may function correctly, but are not supported by Fortinet.

## FortiOS and FortiOS Carrier



The *FortiAnalyzer Release Notes* communicate support for FortiOS versions that are available at the time of the FortiAnalyzer 7.2.3 release. For additional information about other supported FortiOS versions, please refer to the FortiAnalyzer compatibility chart in the [Fortinet Document Library](#).

See [FortiAnalyzer compatibility with FortiOS](#).

---

FortiAnalyzer 7.2.3 supports the following versions of FortiOS and FortiOS Carrier:

- 7.2.0 to 7.2.5
- 7.0.0 to 7.0.12
- 6.4.0 to 6.4.14
- 6.2.0 to 6.2.15
- 6.0.0 to 6.0.17
- 5.6.0 to 5.6.14

## FortiADC

FortiAnalyzer 7.2.3 supports the following versions of FortiADC:

- 7.2.0 and later
- 7.1.0 and later
- 7.0.0 and later

## FortiNDR and FortiAI

FortiAnalyzer 7.2.3 supports the following versions of FortiNDR (formerly FortiAI):

- 7.1.0 and later
- 7.0.0 and later

- 1.5.0 and later

## FortiAnalyzer

FortiAnalyzer 7.2.3 supports the following versions of FortiAnalyzer:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later

## FortiAuthenticator

FortiAnalyzer 7.2.3 supports the following versions of FortiAuthenticator:

- 6.4.0 and later
- 6.3.0 and later
- 6.2.0 and later

## FortiCache

FortiAnalyzer 7.2.3 supports the following versions of FortiCache:

- 4.2.0 and later
- 4.1.0 and later
- 4.0.0 and later

## FortiClient

FortiAnalyzer 7.2.3 supports the following versions of FortiClient:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later
- 6.2.1 and later

When using FortiClient with FortiAnalyzer, it is recommended to upgrade both to their latest versions. The versions between the two products should match. For example, if using FortiAnalyzer 7.2.0, use FortiClient 7.2.0.

## FortiDDoS

FortiAnalyzer 7.2.3 supports the following versions of FortiDDoS:

- 6.4.0 and later
- 6.3.0 and later
- 6.2.0 and later

Limited support. For more information, see [Feature support on page 24](#).

## FortiDeceptor

FortiAnalyzer 7.2.3 supports the following versions of FortiDeceptor:

- 5.0.0 and later
- 4.3.0 and later
- 4.2.0 and later

## FortiFirewall and FortiFirewallCarrier

FortiAnalyzer 7.2.3 supports the following versions of FortiFirewall and FortiFirewallCarrier:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later
- 6.2.0 and later
- 5.6.0 and later

## FortiMail

FortiAnalyzer 7.2.3 supports the following versions of FortiMail:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later

## FortiManager

FortiAnalyzer 7.2.3 supports the following versions of FortiManager:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later

## FortiNAC

FortiAnalyzer 7.2.3 supports the following versions of FortiNAC:

- 9.4.0 and later
- 9.2.0 and later
- 9.1.0 and later

## FortiProxy

FortiAnalyzer 7.2.3 supports the following versions of FortiProxy:

- 7.2.0 to 7.2.5
- 7.0.0 to 7.0.11
- 2.0.0 to 2.0.5
- 1.2.0 to 1.2.13
- 1.1.0 to 1.1.6
- 1.0.0 to 1.0.7

## FortiSandbox

FortiAnalyzer 7.2.3 supports the following versions of FortiSandbox:

- 4.2.0 and later
- 4.0.0 and later
- 3.2.0 and later

## FortiSOAR

FortiAnalyzer 7.2.3 supports the following versions of FortiSOAR:

- 7.3.0 and later
- 7.2.0 and later
- 7.0.0 and later

## FortiSwitch ATCA

FortiAnalyzer 7.2.3 supports the following versions of FortiSwitch ATCA:

- 5.2.0 and later
- 5.0.0 and later
- 4.3.0 and later

## FortiWeb

FortiAnalyzer 7.2.3 supports the following versions of FortiWeb:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later

## Virtualization

FortiAnalyzer 7.2.3 supports the following virtualization software:

- Amazon Web Service AMI, Amazon EC2, Amazon EBS
- Citrix XenServer 7.2
- Google Cloud Platform

- Linux KVM Redhat 7.1
- Microsoft Azure
- Microsoft Hyper-V Server 2012, 2016, and 2019
- Nutanix AHV (AOS 5.10.5)
- OpenSource XenServer 4.2.5
- Oracle Private Cloud
- VMware ESXi versions 6.5 and later

## Feature support

The following table lists FortiAnalyzer feature support for log devices.

Platform	Log View	FortiView	Event Management	Reports
FortiGate	✓	✓	✓	✓
FortiCarrier	✓	✓	✓	✓
FortiADC	✓		✓	
FortiAI	✓	✓	✓	✓
FortiAnalyzer	✓		✓	
FortiAuthenticator	✓			
FortiCache	✓		✓	✓
FortiClient registered to FortiGate	✓	✓		✓
FortiClient registered to FortiClient EMS	✓	✓		✓
FortiDDoS	✓	✓	✓	✓
FortiDeceptor	✓			
FortiFirewall	✓	✓	✓	✓
FortiMail	✓		✓	✓
FortiManager	✓		✓	
FortiNAC	✓			
FortiProxy	✓		✓	✓
FortiSandbox	✓		✓	✓
FortiSOAR	✓		✓	✓
FortiWeb	✓		✓	✓
Syslog	✓		✓	✓



## Language support

The following table lists FortiAnalyzer language support information.

Language	GUI	Reports
English	✓	✓
Chinese (Simplified)	✓	✓
Chinese (Traditional)	✓	✓
French	✓	✓
Hebrew		✓
Hungarian		✓
Japanese	✓	✓
Korean	✓	✓
Portuguese		✓
Russian		✓
Spanish		✓

To change the FortiAnalyzer language setting, go to *System Settings > Admin > Admin Settings*, in *Administrative Settings > Language* select the desired language on the drop-down menu. The default value is *Auto Detect*.

Russian, Hebrew, and Hungarian are not included in the default report languages. You can create your own language translation files for these languages by exporting a predefined language from FortiAnalyzer, modifying the text to a different language, saving the file as a different language name, and then importing the file into FortiAnalyzer. For more information, see the *FortiAnalyzer Administration Guide*.

## Supported models

The following tables list which FortiGate, FortiCarrier, FortiDDoS, FortiAnalyzer, FortiMail, FortiSandbox, FortiSwitch ATCA, FortiWeb, FortiCache, FortiProxy, and FortiAuthenticator models and firmware versions that can be managed by a FortiManager or send logs to a FortiManager running version 7.2.3.



Software license activated LENC devices are supported, if their platforms are in the supported models list. For example, support of FG-3200D indicates support of FG-3200D-LENC.

This section contains the following topics:

- [FortiGate models on page 26](#)
- [FortiGate special branch models on page 31](#)
- [FortiCarrier models on page 35](#)
- [FortiCarrier special branch models on page 37](#)

- [FortiADC models on page 40](#)
- [FortiNDR and FortiAI models on page 40](#)
- [FortiAnalyzer models on page 40](#)
- [FortiAuthenticator models on page 41](#)
- [FortiCache models on page 41](#)
- [FortiDDoS models on page 41](#)
- [FortiDeceptor models on page 42](#)
- [FortiFirewall models on page 42](#)
- [FortiFirewallCarrier models on page 43](#)
- [FortiMail models on page 43](#)
- [FortiNAC models on page 44](#)
- [FortiProxy models on page 44](#)
- [FortiSandbox models on page 44](#)
- [FortiSOAR models on page 45](#)
- [FortiSwitch ATCA models on page 45](#)
- [FortiWeb models on page 45](#)

## FortiGate models

The following FortiGate models are released with FortiOS firmware. For information about supported FortiGate models on special branch releases of FortiOS firmware, see [FortiGate special branch models on page 31](#).

Model	Firmware Version
<b>FortiGate:</b> FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-70F, FortiGate-71F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300E, FortiGate-301E, FortiGate-400E, FortiGate-400F, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-401F, FortiGate-500E, FortiGate-501E, FortiGate-600E, FortiGate-600F, FortiGate-601E, FortiGate-601F, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1500D, FortiGate-1500DT, FortiGate-1800F, FortiGate-1801F, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-2600F, FortiGate-2601F, FortiGate-3000D, FortiGate-3000F, FortiGate-3001F, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3500F, FortiGate-3501F, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3960E, FortiGate-3980E, FortiGate-4200F, FortiGate-4201F, FortiGate-4400F, FortiGate-4401F <b>FortiGate 5000 Series:</b> FortiGate-5001E, FortiGate-5001E1 <b>FortiGate 6000 Series:</b> FortiGate-6000F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC	7.2

Model	Firmware Version
<b>FortiGate 7000 Series:</b> FortiGate-7000E, FortiGate-7000F, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC, FortiGate-7081F, FortiGate-7121F, FortiGate-7121F-2, FortiGate-7121F-2-DC, FortiGate-7121F-DC <b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-1800F-DC, FortiGate-1801F-DC, FortiGate-2201E-ACDC, FortiGate-2600F-DC, FortiGate-2601F-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-4200F-DC, FortiGate-4201F-DC, FortiGate-4400F-DC, FortiGate-4401F-DC <b>FortiWiFi:</b> FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FWF-81F-2R, FWF-81F-2R-3G4G-POE, FWF-81F-2R-POE <b>FortiGate VM:</b> FortiGate-ARM64-AWS, FortiGate-ARM64-Azure, FortiGate-ARM64-GCP, FortiGate-ARM64-KVM, FortiGate-ARM64-OCI, FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-AWS, FortiGate-VM64-Azure, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager <b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-KVM, FOS-VM64-Xen <b>FortiGate Rugged:</b> FGR-60F, FGR-60F-3G4G	
<b>FortiGate:</b> FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-70F, FortiGate-71F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-400F, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-401F, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-600F, FortiGate-601E, FortiGate-601F, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-1800F, FortiGate-1801F, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-2600F, FortiGate-2601F, FortiGate-3000D, FortiGate-3000F, FortiGate-3001F, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3500F, FortiGate-3501F, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E, FortiGate-4200F, FortiGate-4201F, FortiGate-4400F, FortiGate-4401F,	7.0
<b>FortiGate 5000 Series:</b> FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1 <b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-1800F-DC, FortiGate-1801F-DC, FortiGate-2201E-ACDC, FortiGate-2600F-DC, FortiGate-2601F-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-4200F-DC, FortiGate-4201F-DC, FortiGate-4400F-DC, FortiGate-4401F-DC	

Model	Firmware Version
<b>FortiWiFi:</b> FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FWF-81F-2R, FWF-81F-2R-3G4G-POE, FWF-81F-2R-POE <b>FortiGate VM:</b> FortiGate-ARM64-AWS, FortiGate-ARM64-KVM, FortiGate-ARM64-OCI, FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-AWS, FortiGate-VM64-Azure, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager <b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-KVM, FOS-VM64-Xen <b>FortiGate Rugged:</b> FGR-60F, FGR-60F-3G4G	
<b>FortiGate:</b> FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-1800F, FortiGate-1801F, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-2600F, FortiGate-2601F, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E, FortiGate-4200F, FortiGate-4201F, FortiGate-4400F, FortiGate-4401F, <b>FortiGate 5000 Series:</b> FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1 <b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-1800F-DC, FortiGate-1801F-DC, FortiGate-2201E-ACDC, FortiGate-2600F-DC, FortiGate-2601F-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-4200F-DC, FortiGate-4201F-DC, FortiGate-4400F-DC, FortiGate-4401F-DC <b>FortiGate Hardware Low Encryption:</b> FortiGate-100D-LENC <b>FortiWiFi:</b> FWF-40F, FWF-40F-3G4G, FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FWF-81F-2R, FWF-81F-2R-3G4G-POE, FWF-81F-2R-POE <b>FortiGate VM:</b> FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-ALIONDEMAND, FortiGate-VM64-AWS, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-Azure, FortiGate-VM64-GCP, VM64-GCPONDEMAND, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager <b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-KVM, FOS-VM64-Xen	6.4

Model	Firmware Version
<b>FortiGate Rugged:</b> FGR-60F, FGR-60F-3G4G	
<b>FortiGate:</b> FortiGate-30E, FortiGate-30E-3G4G-GBL, FortiGate-30E-3G4G-INTL, FortiGate-30E-3G4G-NAM, FortiGate-40F, FortiGate-40F-3G4G, FortiGate-50E, FortiGate-51E, FortiGate-52E, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-92D, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140D, FortiGate-140D-POE, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3600E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E <b>FortiGate 5000 Series:</b> FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1 <b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-2201E-ACDC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC <b>FortiGate Hardware Low Encryption:</b> FortiGate-100D-LENC <b>FortiWiFi:</b> FWF-30E, FWF-30E-3G4G-INTL, FWF-30E-3G4G-NAM, FWF-40F, FWF-40F-3G4G, FWF-50E, FWF-50E-2R, FWF-51E, FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FortiWiFi-80F-2R-3G4G-DSL, FWF-81F-2R, FWF-81F-2R-POE <b>FortiGate VM:</b> FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-ALIONDEMAND, FortiGate-VM64-AWS, FortiGate-VM64-AWSONDEMAND, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-Azure, FortiGate-VM64-GCP, VM64-GCPONDEMAND, FortiGate-VM64-HV, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager <b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-KVM, FOS-VM64-Xen <b>FortiGate Rugged:</b> FGR-30D, FGR-35D, FGR-60F, FGR-60F-3G4G, FGR-90D	6.2

Model	Firmware Version
<b>FortiGate:</b> FortiGate-30D, FortiGate-30D-POE, FortiGate-30E, FortiGate-30E-3G4G-GBL, FortiGate-30E-3G4G-INTL, FortiGate-30E-3G4G-NAM, FortiGate-50E, FortiGate-51E, FortiGate-52E, FortiGate-60D, FortiGate-60D-POE, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-70D, FortiGate-70D-POE, FortiGate-80C, FortiGate-80CM, FortiGate-80D, FortiGate-80E, FortiGate-80E-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-90D, FortiGate-90D-POE, FortiGate-90E, FortiGate-91E, FortiGate-92D, FortiGate-94D-POE, FortiGate-98D-POE, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-101E, FortiGate-140D, FortiGate-140D-POE, FortiGate-140E, FortiGate-140E-POE, FortiGate-200D, FortiGate-200D-POE, FortiGate-200E, FortiGate-201E, FortiGate-240D, FortiGate-240D-POE, FortiGate-280D-POE, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600C, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800C, FortiGate-800D, FortiGate-900D, FortiGate-1000C, FortiGate-1000D, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-2000E, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3400E, FortiGate-3401E, FortiGate-3600C, FortiGate-3600E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E <b>FortiGate 5000 Series:</b> FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1 <b>FortiGate 6000 Series:</b> FortiGate-6000F, FortiGate-6300F, FortiGate-6301F, FortiGate-6500F, FortiGate-6501F <b>FortiGate 7000 Series:</b> FortiGate-7000E, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E <b>FortiGate DC:</b> FortiGate-80C-DC, FortiGate-401E-DC, FortiGate-600C-DC, FortiGate-800C-DC, FortiGate-1000C-DC, FortiGate-1500D-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600C-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-6000F-DC, FortiGate-6300F-DC, FortiGate-6301F-DC, FortiGate-6500F-DC, FortiGate-6501F-DC, FortiGate-7060E-8-DC <b>FortiGate Hardware Low Encryption:</b> FortiGate-80C-LENC, FortiGate-100D-LENC, FortiGate-600C-LENC, FortiGate-1000C-LENC <b>Note:</b> All license-based LENC is supported based on the FortiGate support list. <b>FortiWiFi:</b> FWF-30D, FWF-30D-POE, FWF-30E, FWF-30E-3G4G-INTL, FWF-30E-3G4G-NAM, FWF-50E, FWF-50E-2R, FWF-51E, FWF-60D, FWF-60D-POE, FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-61E, FWF-80CM, FWF-81CM, FWF-90D, FWF-90D-POE, FWF-92D <b>FortiGate VM:</b> FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-ALIONDEMAND, FortiGate-VM64-AWS, FortiGate-VM64-AWSONDEMAND, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-Azure, FortiGate-VM64-GCP, VM64-GCPONDEMAND, FortiGate-VM64-HV, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager <b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-KVM, FOS-VM64-Xen <b>FortiGate Rugged:</b> FGR-30D, FGR-30D-ADSL-A, FGR-35D, FGR-60D, FGR-90D	6.0

Model	Firmware Version
<b>FortiGate:</b> FortiGate-30D, FortiGate-30D-POE, FortiGate-30E, FortiGate-30E-3G4G-INTL, FortiGate-30E-3G4G-NAM, FortiGate-50E, FortiGate-51E, FortiGate-52E, FortiGate-60D, FortiGate-60D-POE, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-61E, FortiGate-70D, FortiGate-70D-POE, FortiGate-80C, FortiGate-80CM, FortiGate-80D, FortiGate-80E, FortiGate-80E-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-90D, FortiGate-90D-POE, FortiGate-90E, FortiGate-91E, FortiGate-92D, FortiGate-94D-POE, FortiGate-98D-POE, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-101E, FortiGate-140D, FortiGate-140D-POE, FortiGate-140E, FortiGate-140E-POE, FortiGate-200D, FortiGate-200D-POE, FortiGate-200E, FortiGate-201E, FortiGate-240D, FortiGate-240D-POE, FortiGate-280D-POE, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600C, FortiGate-600D, FortiGate-800C, FortiGate-800D, FortiGate-900D, FortiGate-1000C, FortiGate-1000D, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3240C, FortiGate-3600C, FortiGate-3700D, FortiGate-3700DX, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E <b>FortiGate 5000 Series:</b> FortiGate-5001C, FortiGate-5001D, FortiGate-5001E <b>FortiGate DC:</b> FortiGate-80C-DC, FortiGate-600C-DC, FortiGate-800C-DC, FortiGate-800D-DC, FortiGate-1000C-DC, FortiGate-1500D-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3240C-DC, FortiGate-3600C-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC <b>FortiGate Hardware Low Encryption:</b> FortiGate-80C-LENC, FortiGate-100D-LENC, FortiGate-600C-LENC, FortiGate-1000C-LENC <b>Note:</b> All license-based LENC is supported based on the FortiGate support list. <b>FortiWiFi:</b> FWF-30D, FWF-30D-POE, FWF-30E, FWF-30E-3G4G-INTL, FWF-30E-3G4G-NAM, FWF-50E, FWF-50E-2R, FWF-51E, FWF-60D, FWF-60D-POE, FWF-60E, FWF-61E, FWF-80CM, FWF-81CM, FWF-90D, FWF-90D-POE, FWF-92D <b>FortiGate VM:</b> FortiGate-VM64, FortiGate-VM64-AWS, FortiGate-VM64-AWSONDEMAND, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-Azure, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager <b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-Xen <b>FortiGate Rugged:</b> FGR-30D, FGR-35D, FGR-60D, FGR-90D	5.6

## FortiGate special branch models

The following FortiGate models are released on special branches of FortiOS. FortiAnalyzer version 7.2.3 supports these models on the identified FortiOS version and build number.

For information about supported FortiGate models released with FortiOS firmware, see [FortiGate models on page 26](#).



## FortiOS 7.2

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-3200F	7.2.5	4373
FortiGate-3201F	7.2.5	4384
FortiGate-3700F, FortiGate-3701F	7.2.5	4394
FortiGate-4800F, FortiGate-4801F	7.2.5	4394

## FortiOS 7.0

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-80F-DSL	7.0.11	4974
FortiGate-900G, FortiGate-901G	7.0.10	6566
FortiGate-1000F, FortiGate-1001F	7.0.12	6660
FortiGate-3200F, FortiGate-3201F	7.0.12	6661
FortiGate-3700F, FortiGate-3701F	7.0.12	6661
FortiGate-4800F, FortiGate-4801F	7.0.12	6661
FortiGate-6000F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC	7.0.12	0163
FortiGate-7000E, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC	7.0.12	0163
FortiGate-7000F, FortiGate-7081F, FortiGate-7121F, FortiGate-7121F-2, FortiGate-7121F-2-DC, FortiGate-7121F-DC	7.0.12	0163
FortiGateRugged-70F, FortiGateRugged-70F-3G4G	7.0.11	6565

## FortiOS 6.4

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-400F, FortiGate-401F	6.4.12	5429
FortiGate-600F, FortiGate-601F	6.4.12	5429



FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-3500F	6.4.6	5886
FortiGate-3501F	6.4.6	6132
FortiGate-6000F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC	6.4.13	1926
FortiGate-7000E, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC	6.4.13	1926
FortiGate-7000F, FortiGate-7081F, FortiGate-7121F, FortiGate-7121F-2, FortiGate-7121F-2-DC, FortiGate-7121F-DC	6.4.13	1926
FortiWiFi-80F-2R-3G4G-DSL	6.4.7	5003

## FortiOS 6.2

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-80D	6.2.13	5238
FortiGate-200F, FortiGate-201F	6.2.13	7249
FortiGate-1800F, FortiGate-1800F-DC FortiGate-1801F, FortiGate-1801F-DC	6.2.9	7197
FortiGate-2600F, FortiGate-2600F-DC FortiGate-2601F, FortiGate-2601F-DC	6.2.9	7197
FortiGate-4200F, FortiGate-4200F-DC FortiGate-4201F, FortiGate-4201F-DC	6.2.9	7197
FortiGate-4400F, FortiGate-4400F-DC FortiGate-4401F, FortiGate-4401F-DC	6.2.9	7197
FortiGate-6000F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC	6.2.13	1271
FortiGate-7000E, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC	6.2.13	1271

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-7000F, FortiGate-7081F, FortiGate-7121F, FortiGate-7121F-2, FortiGate-7121F-2-DC, FortiGate-7121F-DC		
FortiWiFi-81F-2R-3G4G-DSL	6.2.6	7219

## FortiOS 6.0

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-30E-3G4G-GBL	6.0	5486
FortiGate-40F, FortiGate-40F-3G4G	6.0	6887
FortiGate-41F	6.0.6	6445
FortiGate-41F-3G4G	6.0.6	6674
FortiGate-60F, FortiGate-61F	6.0	6890
FortiGate-100F, FortiGate-101F	6.0	6890
FortiGate-1100E, FortiGate-1100E-DC, FortiGate-1101E	6.0	6886
FortiGate-1800F, FortiGate-1800F-DC FortiGate-1801F, FortiGate-1801F-DC	6.0	6889
FortiGate-2200E, FortiGate-2201E, FortiGate-2201E-ACDC	6.0	6888
FortiGate-3300E, FortiGate-3301E	6.0	6888
FortiWiFi-40F, FortiWiFi-40F-3G4G	6.0	6887
FortiWiFi-41F	6.0.6	6674
FortiWiFi-41F-3G4G	6.0.6	6445
FortiWiFi-60F, FortiWiFi-61F	6.0	6890

## FortiOS 5.6

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-5001E1	5.6	7796
FortiGate-6000F, FortiGate-6300F , FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC	5.6.12	4286

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-7000E, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC	5.6.12	4286
FWF-60E-DSL, FWF-60E-DSLJ	5.6.8	4211
FortiOS-VM64-KVM	5.6	4081

## FortiCarrier models

The following FortiCarrier models are released with FortiCarrier firmware.

For information about supported FortiCarrier models on special branch releases of FortiCarrier firmware, see [FortiCarrier special branch models on page 37](#).

Model	Firmware Version
<b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3000F, FortiCarrier-3001F, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-4200F, FortiCarrier-4201F, FortiCarrier-4400F, FortiCarrier-4401F, FortiCarrier-5001E, FortiCarrier-5001E1 <b>FortiCarrier 6000 Series:</b> FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC <b>FortiCarrier 7000 Series:</b> FortiCarrier-7000E, FortiCarrier-7000F, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC, FortiCarrier-7081F, FortiCarrier-7121F, FortiCarrier-7121F-2, FortiCarrier-7121F-2-DC, FortiCarrier-7121F-DC <b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC, FortiCarrier-4200F-DC, FortiCarrier-4201F-DC, FortiCarrier-4400F-DC, FortiCarrier-4401F-DC <b>FortiCarrier-VM:</b> FortiCarrier-ARM64-AWS, FortiCarrier-ARM64-Azure, FortiCarrier-ARM64-GCP, FortiCarrier-ARM64-KVM, FortiCarrier-ARM64-OCI, FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	7.2
<b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3000F, FortiCarrier-3001F, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1	7.0

Model	Firmware Version
<p><b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC</p> <p><b>FortiCarrier-VM:</b> FortiCarrier-ARM64-AWS, FortiCarrier-ARM64-KVM, FortiCarrier-ARM64-OCI, FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen, FortiCarrier-ARM64-KVM</p>	
<p><b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1</p> <p><b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC</p> <p><b>FortiCarrier-VM:</b> FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen</p>	6.4
<p><b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1</p> <p><b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC</p> <p><b>FortiCarrier 6K and 7K:</b> FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6301F, FortiCarrier-6500F, FortiCarrier-6501F, FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7000F, FortiCarrier-7121F, FortiCarrier-7121F-2</p> <p><b>FortiCarrier 6K and 7K DC:</b> FortiCarrier-6000F-DC, FortiCarrier-6300F-DC, FortiCarrier-6301F-DC, FortiCarrier-6500F-DC, FortiCarrier-6501F-DC, FortiCarrier-7060E-8-DC, FortiCarrier-7121F-DC, FortiCarrier-7121F-2-DC</p> <p><b>FortiCarrier-VM:</b> FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen</p>	6.2
<p><b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1</p>	6.0

Model	Firmware Version
<b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC <b>FortiCarrier-VM:</b> FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-AWSONDEMAND, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	
<b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3240C, FortiCarrier-3600C, FortiCarrier-3700D, FortiCarrier-3700DX, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001C, FortiCarrier-5001D, FortiCarrier-5001E <b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3240C-DC, FortiCarrier-3600C-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC <b>FortiCarrier-VM:</b> FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-AWSONDEMAND, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	5.6

## FortiCarrier special branch models

The following FortiCarrier models are released on special branches of FortiOS Carrier. FortiAnalyzer version 7.2.3 supports these models on the identified FortiOS Carrier version and build number.

For information about supported FortiCarrier models released with FortiOS Carrier firmware, see [FortiCarrier models on page 35](#).

### FortiCarrier 7.2

FortiCarrier Model	FortiCarrier Version	FortiCarrier Build
FortiCarrier-3200F	7.2.5	4373
FortiCarrier-3201F	7.2.5	4384
FortiCarrier-3700F, FortiCarrier-3701F	7.2.5	4394
FortiCarrier-4800F, FortiCarrier-4801F	7.2.5	4394

## FortiCarrier 7.0

FortiCarrier Model	FortiCarrier Version	FortiCarrier Build
FortiCarrier-3200F, FortiCarrier-3201F	7.0.12	6661
FortiCarrier-3700F, FortiCarrier-3701F	7.0.12	6661
FortiCarrier-4800F, FortiCarrier-4801F	7.0.12	6661
FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC	7.0.12	0163
FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC	7.0.12	0163
FortiCarrier-7000F, FortiCarrier-7081F, FortiCarrier-7121F, FortiCarrier-7121F-2, FortiCarrier-7121F-2-DC, FortiCarrier-7121F-DC	7.0.12	0163

## FortiCarrier 6.4

FortiCarrier Model	FortiCarrier Version	FortiCarrier Build
FortiCarrier-3500F	6.4.6	5886
FortiCarrier-3501F	6.4.6	6132
FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC	6.4.13	1926
FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC	6.4.13	1926
FortiCarrier-7000F, FortiCarrier-7081F, FortiCarrier-7121F, FortiCarrier-7121F-2, FortiCarrier-7121F-2-DC, FortiCarrier-7121F-DC	6.4.13	1926

## FortiCarrier 6.2

FortiCarrier Model	FortiCarrier Version	FortiCarrier Build
FortiCarrier-4200F, FortiCarrier-4200F-DC FortiCarrier-4201F, FortiCarrier-4201F-DC FortiCarrier-4400F, FortiCarrier-4400F-DC, FortiCarrier-4401F, FortiCarrier-4401F-DC	6.2.9	7197
FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC	6.2.13	1271
FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC FortiCarrier-7000F, FortiCarrier-7081F, FortiCarrier-7121F, FortiCarrier-7121F-2, FortiCarrier-7121F-2-DC, FortiCarrier- 7121F-DC	6.2.13	1271

## FortiCarrier 6.0

FortiCarrier Model	FortiCarrier Version	FortiCarrier Build
FortiCarrier-VM64-Azure	6.0	5485

## FortiCarrier 5.6

FortiCarrier Model	FortiCarrier Version	FortiCarrier Build
FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC	5.6.12	4286
FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC	5.6.12	4286

## FortiADC models

Model	Firmware Version
<b>FortiADC:</b> FortiADC-100F, FortiADC-120F, FortiADC-200D, FortiADC-200F, FortiADC-220F, FortiADC-300D, FortiADC-300F, FortiADC-400D, FortiADC-400F, FortiADC-700D, FortiADC-1000F, FortiADC-1200F, FortiADC-1500D, FortiADC-2000D, FortiADC-2000F, FortiADC-2200F, FortiADC-4000D, FortiADC-4000F, FortiADC-4200F, FortiADC-5000F <b>FortiADC VM:</b> FortiADC-VM	7.0, 7.1, 7.2

## FortiNDR and FortiAI models

Model	Firmware Version
<b>FortiAI:</b> FAI-3500F <b>FortiAI-VM:</b> FAI-VM, FAI-KVM	7.0, 7.1
<b>FortiAI:</b> FAI-3500F <b>FortiAI-VM:</b> FAI-VM, FAI-KVM	1.5

## FortiAnalyzer models

Model	Firmware Version
<b>FortiAnalyzer:</b> FortiAnalyzer-150G, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3700F, FortiAnalyzer-3700G, FortiAnalyzer-3900E <b>FortiAnalyzer VM:</b> FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-ALI, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-AWS-OnDemand, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-Azure-OnDemand, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-IBM, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	7.2
<b>FortiAnalyzer:</b> FortiAnalyzer-150G, FortiAnalyzer-200F, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3700F, FortiAnalyzer-3700G, FortiAnalyzer-3900E <b>FortiAnalyzer VM:</b> FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-ALI, FortiAnalyzer-VM64-ALI-OnDemand, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-Azure-OnDemand, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-GCP-OnDemand, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-IBM, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	7.0



Model	Firmware Version
<b>FortiAnalyzer:</b> FortiAnalyzer-150G, FortiAnalyzer-200F, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-1000E, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3700F, FortiAnalyzer-3700G, FortiAnalyzer-3900E <b>FortiAnalyzer VM:</b> FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-ALI, FortiAnalyzer-VM64-ALI-OnDemand, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-AWSOnDemand, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-Azure-OnDemand, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-GCP-OnDemand, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	6.4

## FortiAuthenticator models

Model	Firmware Version
<b>FortiAuthenticator:</b> FAC-200D, FAC-200E, FAC-300F, FAC-400C, FAC-400E, FAC-800F, FAC-1000C, FAC-1000D, FAC-2000E, FAC-3000D, FAC-3000E, FAC-3000F <b>FortiAuthenticator VM:</b> FAC-VM	6.4
<b>FortiAuthenticator:</b> FAC-200D, FAC-200E, FAC-300F, FAC-400C, FAC-400E, FAC-800F, FAC-1000C, FAC-1000D, FAC-2000E, FAC-3000D, FAC-3000E <b>FortiAuthenticator VM:</b> FAC-VM	6.2, 6.3

## FortiCache models

Model	Firmware Version
<b>FortiCache:</b> FCH-400C, FCH-400E, FCH-1000C, FCH-1000D, FCH-3000C, FCH-3000D, FCH-3000E, FCH-3900E <b>FortiCache VM:</b> FCH-KVM, FCH-VM64	4.1, 4.2
<b>FortiCache:</b> FCH-400C, FCH-400E, FCH-1000C, FCH-1000D, FCH-3000C, FCH-3000D, FCH-3900E <b>FortiCache VM:</b> FCH-VM64	4.0

## FortiDDoS models

Model	Firmware Version
<b>FortiDDoS:</b> FortiDDoS-200F, FortiDDoS-1500F, FortiDDoS-2000F, FortiDDoS-3000F <b>FortiDDoS VM:</b> FortiDDoS-VM	6.4
<b>FortiDDoS:</b> FortiDDoS-200F, FortiDDoS-1500F, FortiDDoS-2000F <b>FortiDDoS VM:</b> FortiDDoS-VM	6.3

Model	Firmware Version
<b>FortiDDoS:</b> FortiDDoS-200F, FortiDDoS-1500F	6.2
<b>FortiDDoS VM:</b> FortiDDoS-VM	

## FortiDeceptor models

Model	Firmware Version
<b>FortiDeceptor:</b> FDC-100G, FDC-1000F, FDC-1000G	5.0
<b>FortiDeceptor Rugged:</b> FDCR-100G	
<b>FortiDeceptor VM:</b> FDC-VM	
<b>FortiDeceptor:</b> FDC-1000F, FDC-1000G	4.3
<b>FortiDeceptor Rugged:</b> FDCR-100G	
<b>FortiDeceptor VM:</b> FDC-VM	
<b>FortiDeceptor:</b> FDC-1000F, FDC-1000G	4.2
<b>FortiDeceptor Rugged:</b> FDCR-100G	
<b>FortiDeceptor VM:</b> FDC-VM	

## FortiFirewall models

Some of the following FortiFirewall models are released on special branches of FortiFirewall firmware. FortiAnalyzer version 7.2.3 supports these models on the identified FortiFirewall firmware version and build number.

### FortiFirewall 7.2

Model	Firmware Version
<b>FortiFirewall:</b> FortiFirewall-3980E	7.2
<b>FortiFirewall-VM:</b> FortiFirewall-VM64, FortiFirewall-VM64-KVM	

### FortiFirewall 7.0

Model	Firmware Version	Firmware Build (for special branch)
<b>FortiFirewall:</b> FortiFirewall-3001F	7.0.10	4955
<b>FortiFirewall:</b> FortiFirewall-3501F	7.0.10	4940
<b>FortiFirewall:</b> FortiFirewall-3980E	7.0	
<b>FortiFirewall DC:</b> FortiFirewall-3980E-DC		
<b>FortiFirewall-VM:</b> FortiFirewall-VM64, FortiFirewall-VM64-KVM	7.0	

## FortiFirewall 6.4

Model	Firmware Version	Firmware Build (for special branch)
<b>FortiFirewall:</b> FortiFirewall-1801F, FortiFirewall-2600F <b>FortiFirewall DC:</b> FortiFirewall-1801F-DC, FortiFirewall-2600F-DC	6.4.12	5423
<b>FortiFirewall:</b> FortiFirewall-3980E <b>FortiFirewall DC:</b> FortiFirewall-3980E-DC	6.4	
<b>FortiFirewall:</b> FortiFirewall-4200F, FortiFirewall-4400F	6.4	1999
<b>FortiFirewall:</b> FortiFirewall-4401F <b>FortiFirewall DC:</b> FortiFirewall-4401F-DC	6.4.12	5423
<b>FortiFirewall-VM:</b> FortiFirewall-VM64, FortiFirewall-VM64-KVM	6.4	

## FortiFirewallCarrier models

Some of the following FortiFirewallCarrier models are released on special branches of FortiFirewallCarrier firmware. FortiAnalyzer version 7.2.3 supports these models on the identified FortiFirewallCarrier firmware version and build number.

Model	Firmware Version	Firmware Build
<b>FortiFirewallCarrier:</b> FortiFirewallCarrier-3001F	7.0.10	4955
<b>FortiFirewallCarrier:</b> FortiFirewallCarrier-3501F	7.0.10	4940
<b>FortiFirewallCarrier:</b> FortiFirewallCarrier-4200F, FortiFirewallCarrier-4400F	6.4	1999
<b>FortiFirewallCarrier:</b> FortiFirewallCarrier-4200F, FortiFirewallCarrier-4400F	6.2.7	5148
<b>FortiFirewallCarrier:</b> FortiFirewallCarrier-4401F	6.4.9	5318

## FortiMail models

Model	Firmware Version
<b>FortiMail:</b> FE-60D, FE-200D, FE-200E, FE-200F, FE-400E, FE-400F, FE-900F, FE-2000F, FE-3000F	7.2
<b>FortiMail:</b> FE-60D, FE-200D, FE-200E, FE-200F, FE-400E, FE-400F, FE-900F, FE-1000D, FE-2000E, FE-2000F, FE-3000D, FE-3000E, FE-3000F, FE-3200E	7.0

Model	Firmware Version
<b>FortiMail VM:</b> FML-VM	
<b>FortiMail:</b> FE-60D, FE-200D, FE-200E, FE-200F, FE-400E, FE-400F, FE-900F, FE-1000D, FE-2000E, FE-3000D, FE-3000E, FE-3200E <b>FortiMail VM:</b> FML-VM	6.4

## FortiNAC models

Model	Firmware Version
<b>FortiNAC:</b> FortiNAC-500, FortiNAC-600, FortiNAC-700, FortiNAC-C-1000C, FortiNAC-C-2000C, FortiNAC-Manager-550 <b>FortiNAC VM:</b> FortiNAC-C-VM, FortiNAC-M-VM	9.4
<b>FortiNAC:</b> FortiNAC-500, FortiNAC-600, FortiNAC-700, FortiNAC-C-1000C, FortiNAC-C-2000C, FortiNAC-Manager-550 <b>FortiNAC VM:</b> FortiNAC-C-VM, FortiNAC-CA-VM, FortiNAC-M-VM	9.1, 9.2

## FortiProxy models

Model	Firmware Version
<b>FortiProxy:</b> FPX-400E, FPX-2000E, FPX-4000E, <b>FortiProxy VM:</b> FortiProxy-AliCloud, FortiProxy-AWS, FortiProxy-Azure, FortiProxy-GCP, FortiProxy-HyperV, FortiProxy-KVM, FortiProxy-VM64	7.2
<b>FortiProxy:</b> FPX-400E, FPX-400G, FPX-2000E, FPX-2000G, FPX-4000E, FPX-4000G <b>FortiProxy VM:</b> FortiProxy-AliCloud, FortiProxy-AWS, FortiProxy-Azure, FortiProxy-GCP, FortiProxy-HyperV, FortiProxy-KVM, FortiProxy-VM64	7.0
<b>FortiProxy:</b> FPX-400E, FPX-2000E, FPX-4000E <b>FortiProxy VM:</b> FortiProxy-KVM, FortiProxy-VM64	1.0, 1.1, 1.2, 2.0

## FortiSandbox models

Model	Firmware Version
<b>FortiSandbox:</b> FSA-500F, FSA-1000D, FSA-1000F, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3000F, FSA-3500D <b>FortiSandbox DC:</b> FSA-1000F-DC <b>FortiSandbox-VM:</b> FortiSandbox-AWS, FortiSandbox-Cloud, FSA-VM	4.2
<b>FortiSandbox:</b> FSA-500F, FSA-1000D, FSA-1000F, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3000F, FSA-3500D	4.0

Model	Firmware Version
<b>FortiSandbox DC:</b> FSA-1000F-DC	
<b>FortiSandbox-VM:</b> FortiSandbox-AWS, FortiSandbox-Cloud, FSA-VM	
<b>FortiSandbox:</b> FSA-500F, FSA-1000D, FSA-1000F, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3500D	3.2
<b>FortiSandbox DC:</b> FSA-1000F-DC	
<b>FortiSandbox-VM:</b> FortiSandbox-AWS, FSA-VM	

## FortiSOAR models

Model	Firmware Version
<b>FortiSOAR VM:</b> FortiSOAR-VM	7.0, 7.2, 7.3

## FortiSwitch ATCA models

Model	Firmware Version
<b>FortiController:</b> FTCL-5103B, FTCL-5903C, FTCL-5913C	5.2
<b>FortiSwitch-ATCA:</b> FS-5003A, FS-5003B	5.0
<b>FortiController:</b> FTCL-5103B	
<b>FortiSwitch-ATCA:</b> FS-5003A, FS-5003B	4.3

## FortiWeb models

Model	Firmware Version
<b>FortiWeb:</b> FortiWeb-100D, FortiWeb-100E, FortiWeb-400C, FortiWeb-400D, FortiWeb-400E, FortiWeb-600D, FortiWeb-600E, FortiWeb-1000D, FortiWeb-1000E, FortiWeb-2000E, FortiWeb-2000F, FortiWeb-3000C, FortiWeb-3000CFSX, FortiWeb-3000D, FortiWeb-3000DFSX, FortiWeb-3000E, FortiWeb-3000F, FortiWeb-3010E, FortiWeb-4000C, FortiWeb-4000D, FortiWeb-4000E, FortiWeb-4000F	6.4, 7.0, 7.2
<b>FortiWeb VM:</b> FortiWeb-Azure, FortiWeb-Azure_OnDemand, FortiWeb-Docker, FortiWeb-GCP, FortiWeb-GCP_OnDemand, FortiWeb-HyperV, FortiWeb-VM, FortiWeb-XENOpenSource, FortiWeb-XENServer	

# Resolved Issues

The following issues have been fixed in FortiAnalyzer version 7.2.3. To inquire about a particular bug, please contact [Customer Service & Support](#).

## Device Manager

Bug ID	Description
728715	FortiAnalyzer displays red logging status for VDOMs with low traffic rate.
874375	Numerous undesired VDOMs are displayed in <i>Device Manager</i> configuration, even after removing stills are visible.

## FortiSOC

Bug ID	Description
855996	Incidents section does not display any information.

## FortiView

Bug ID	Description
810109	The FortiAnalyzer sometimes fails to send the detected IOC logs to the FortiGate, resulting in the inability to trigger the compromised host automation scripts.
888215	Session graphic does not display values for pass traffic when the traffic is allowed.

## Log View

Bug ID	Description
704206	When filtering with "Action" and "Source IP" under <i>Traffic</i> menu, the filter output may be incorrect with the combination of smart action with any other field.
763852	If a user uses "Filter Mode" and types "=", FortiAnalyzer returns equal character, "=", twice.

Bug ID	Description
785559	Filtering messages using the smart action field might not display the proper results.
860990	In the <i>Log View</i> section, the log file's sorting function does not work and the arrow icon is missing.
898489	The logs from FortiGate devices are not visible in FortiAnalyzer when selecting a 1-hour time range.

## Others

Bug ID	Description
838182	Logs are not being inserted into the secondary FortiAnalyzer.
875222	Duplicated logs received by FortiAnalyzer are handled in a way that decreases the FortiAnalyzer performance significantly.
880438	Log aggregation does not work properly with the following error message: "Aggregate log file failed".
919088	GUI may not work properly in Google Chrome and Microsoft Edge version 114.

## Reports

Bug ID	Description
837826	The event logs does not create any event logs whenever reports are being generated via "run report".
879517	In " <i>Secure SD-WAN Report</i> ", SD-WAN performance displays gray intervals even when there are SD-WAN SLA status logs.

## System Settings

Bug ID	Description
863118	When Log Forwarding is enabled, "Device Filters" does not forward logs to a Syslog server.
882195	If HA attribute "hb-interface" is empty, upgrading directly from 7.0.5 may unset the HA configuration.

Bug ID	Description
888374	Admin user's ADOM setting cannot be synced to secondary when <code>adom-access</code> is set to <code>specify</code> .
903959	Blank pages have been observed when switching tabs in <i>System Settings</i> .

## Common Vulnerabilities and Exposures

Visit <https://fortiguard.com/psirt> for more information.

Bug ID	CVE references
841030	FortiAnalyzer 7.2.3 is no longer vulnerable to the following CVE Reference: <ul style="list-style-type: none"><li>• CVE-2023-25607</li></ul>
850883	FortiAnalyzer 7.2.3 is no longer vulnerable to the following CVE Reference: <ul style="list-style-type: none"><li>• CVE-2023-36638</li></ul>



# Known Issues

The following issues have been identified in FortiAnalyzer version 7.2.3. To inquire about a particular bug or to report a bug, please contact [Fortinet Customer Service & Support](#).

## Device Manager

Bug ID	Description
882093	Unexpected FortiNAC ADOM is added to FortiAnalyzer after the upgrade.

## Event Management

Bug ID	Description
890371	The generic connector is keeps sending the failed to sent alert notification for the matched event handler endlessly.

## FortiSOC

Bug ID	Description
860245	FortiAnalyzer is unable to delete all of the FortiSOC Incidents entries at once from the GUI.

## FortiView

Bug ID	Description
903322	Top Website Domains, Top Website Categories , and Top Browsing Users under the <i>FortiView</i> may not display logs properly, if the logflag fields are not correct.
918623	Visiting the Secure <i>SD-WAN Monitor</i> section makes the page unresponsive and does not load.

## Log View

Bug ID	Description
904135	Time Stamp column under <i>Log View</i> is blank.
913740	For the DLP under the <i>Log View</i> , the "Subject" column of SMTP log is blank in formatted mode.
924701	The action columns on the traffic log are no longer displayed in color.
925905	Tabs under the <i>Log View &gt; FortiWeb</i> displays a blank page.

## Others

Bug ID	Description
883297	If FortiAnalyzer is receiving FortiClient logs, the 'oftpd' process consumes excessive system resources, which might impair the proper functioning of FortiAnalyzer.
912636	log-integrity checking with md5 enabled fails.
915301	<i>FortiView</i> widgets on FortiProxy shows "Failed to Retrieve Fortiview Data".
922549	The FortiAnalyzer HA cluster synchronization is stuck at the "HA_SYNC_STATE_SENDING_METADATA" status.
927379	FortiGuard Firmware does not suggest version 7.2.3 to upgrade.
927670	Secondary FortiAnalyzer is generating false alerts with the following error message: "Did not receive any log from device."
942465	Excessive "oftpd process" usage may adversely affect the proper functioning of the FortiAnalyzer.

## Reports

Bug ID	Description
878067	Legend field on table chart cannot be edited/saved.
895106	Top destination by bandwidth dataset does not exclude long-live session.
896843	The "fgt-intf-stats-summary-rcvd/sent-bps" report does not include the interface from non-mgmt vdoms.
920531	Blank page is displayed when creating new chart and selecting "Order By".

## System Settings

Bug ID	Description
898441	Unable to set <i>Match Criteria</i> to "Not equal to/Not Contain" via GUI under the Log Forwarding settings.
899443	No Data In PCAP File Produced in GUI Packet Capture.
907678	Configured role loges are not automatically deleted after being sent to the file server.
956884	FortiAnalyzer's HA Status consistently switches to "Negotiating" during the process of HA configuration synchronization.

# Appendix A - Default and maximum number of ADOMs supported

This section identifies the supported number of ADOMs for FortiAnalyzer hardware models and virtual machines.

See also the [FortiAnalyzer Data Sheet](#).

## Hardware models



For ADOM subscription licenses, FortiAnalyzer enforces the ADOM limits.

For hardware models that do not support the ADOM subscription license, ADOM limits are recommended, but not enforced.

FortiAnalyzer supports a default number of ADOMs based on hardware model.

Some hardware models support an ADOM subscription license. When you purchase an ADOM subscription license, you increase the number of supported ADOMs. For example, you can purchase an ADOM subscription license for the FAZ-3000G series, which allows you to use up to a maximum of 1200 ADOMs.

Other hardware models do not support the ADOM subscription license. For hardware models that do not support the ADOM subscription license, the default and maximum number of ADOMs is the same.

FortiAnalyzer Platform	Default number of ADOMs	ADOM license support?	Maximum number of ADOMs
Desktop models	1		1
150G Series	3		3
300F/300G and 400E Series	25		25
800F/800G and 1000F Series	50		50
2000E Series	250		250
3000F Series	500		500
3000G Series	500	✓	1200
3500F/3500G	500		500
3700F Series	1200		1200
3700G Series	1200	✓	10,000

## Virtual Machines



For subscription licenses, FortiAnalyzer enforces the ADOM limits.  
For perpetual licenses, ADOM limits are recommended, but not enforced.

### FortiAnalyzer subscription license

Five (5) ADOMs are included with FortiAnalyzer VM subscription licenses. Additional ADOMs can be purchased with an ADOM subscription license.

### FortiAnalyzer perpetual license

Recommended maximum number of ADOMs supported:

FortiAnalyzer Platform	Default number of ADOMs
1 GB/Day < License <= 5 GB/Day	10
5 GB/Day < License <= 25 GB/Day	25
25 GB/Day < License <= 100 GB/Day	50
100 GB/Day < License <= 500 GB/Day	250
500 GB/Day < License <= 1000 GB/Day	500
1000 GB/Day < License <= 5000 GB/Day	800
License > 5000 GB/Day	1200



FortiAnalyzer VM subscription and perpetual licenses are stackable.



[www.fortinet.com](http://www.fortinet.com)

Copyright© 2023 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.